




มาตรฐานผลิตภัณฑ์อุตสาหกรรม

THAI INDUSTRIAL STANDARD

มอก. 1619—2552

IEC 61169—8(2007—02)

ขั้วต่อสำหรับใช้ในงานรับส่งคลื่นความถี่วิทยุ

เล่ม 8 ขั้วต่อร่วมแกนขนาดตัวนำรอบนอก 6.5 มิลลิเมตร ที่เชื่อมต่อแบบ
สลักล็อกคิมพีแดนซ์ลักษณะ 50 โอห์ม (แบบ BNC)

RADIO FREQUENCY CONNECTORS

PART 8 - SECTIONAL SPECIFICATION-RF COAXIAL CONNECTORS WITH INNER DIAMETER OF
OUTER CONDUCTOR 6,5 MM(0,256 IN) WITH BAYONET LOCK-CHARACTERISTIC IMPEDANCE 50
(TYPE BNC)

สำนักงานมาตรฐานผลิตภัณฑ์อุตสาหกรรม

กระทรวงอุตสาหกรรม

ICS 29.120.20

ISBN 978-616-231-234-2

มาตรฐานผลิตภัณฑ์อุตสาหกรรม
ขั้วต่อสำหรับใช้ในงานรับส่งคลื่นความถี่วิทยุ
เล่ม 8 ขั้วต่อร่วมแกนขนาดตัวนำรอบนอก 6.5 มิลลิเมตร ที่เชื่อมต่อแบบ
สลักล็อกอิมพีแดนซ์ลักษณะ 50 โอห์ม (แบบ BNC)

มอก. 1619 – 2552

สำนักงานมาตรฐานผลิตภัณฑ์อุตสาหกรรม
กระทรวงอุตสาหกรรม ถนนพระรามที่ 6 กรุงเทพฯ 10400
โทรศัพท์ 02 202 3300

ประกาศในราชกิจจานุเบกษา ฉบับประกาศและงานทั่วไป เล่ม 127 ตอนพิเศษ 28 ง
วันที่ 2 มีนาคม พุทธศักราช 2553

มาตรฐานผลิตภัณฑ์อุตสาหกรรมข้อต่อสำหรับใช้ในงานรับส่งคลื่นความถี่วิทยุ เล่ม 8 ข้อต่อร่วมแกนขนาดตัวนำรอบนอก 6.5 มิลลิเมตรที่เชื่อมต่อแบบสลักล็อก อิมพีแดนซ์ลักษณะ 50 โอห์ม (แบบ BNC) ได้ประกาศใช้ครั้งแรกโดยรับ IEC 169-8(1978)(Amendment(1996))(Amendment2(1997)) Radio-frequency connectors-Part8: R.F. coaxial connectors with inner diameter of outer conductor 6,5 mm(0,256in) with bayonet lock-Characteristic impedance 50Ω(type BNC) มาใช้ในระดับเหมือนกันทุกประการ(Identical) โดยใช้ IEC ฉบับภาษาอังกฤษเป็นหลัก โดยประกาศในราชกิจจานุเบกษา ฉบับประกาศทั่วไป เล่มที่ 116 ตอนพิเศษที่ 108 ง วันที่ 27 ธันวาคม พุทธศักราช 2542

เนื่องจาก IEC ได้แก้ไขปรับปรุงมาตรฐาน IEC 169-8(1978)(Amendment(1996))(Amendment2(1997)) เป็น IEC 61169-8(2007) จึงได้ยกเลิกมาตรฐานเดิมและกำหนดมาตรฐานใหม่โดยรับ IEC 61169-8(2007) Radio-Frequency Connectors Part8: Sectional specification-RF coaxial connectors with inner diameter of outer conductor 6,5 mm(0,256in) with bayonet lock-Characteristic impedance 50Ω(type BNC) มาใช้ในระดับเหมือนกันทุกประการโดยใช้มาตรฐาน IEC ฉบับภาษาอังกฤษเป็นหลัก

คณะกรรมการมาตรฐานผลิตภัณฑ์อุตสาหกรรมได้พิจารณามาตรฐานนี้แล้ว เห็นสมควรเสนอรัฐมนตรีประกาศตาม มาตรา 15 แห่งพระราชบัญญัติมาตรฐานผลิตภัณฑ์อุตสาหกรรม พ.ศ. 2511



ประกาศกระทรวงอุตสาหกรรม

ฉบับที่ 4088 (พ.ศ. 2552)

ออกตามความในพระราชบัญญัติมาตรฐานผลิตภัณฑ์อุตสาหกรรม

พ.ศ. 2511

เรื่อง ยกเลิกและกำหนดมาตรฐานผลิตภัณฑ์อุตสาหกรรม

ข้อต่อสำหรับใช้ในงานรับส่งคลื่นความถี่วิทยุ

เล่ม 8 ข้อต่อร่วมแกน ขนาดตัวนำรอบนอก 6.5 มิลลิเมตรที่เชื่อมต่อแบบ

สลักล็อก อิมพีแดนซ์ลักษณะ 50 โอห์ม (แบบ BNC)

โดยที่เป็นการสมควรปรับปรุงมาตรฐานผลิตภัณฑ์อุตสาหกรรม ข้อต่อสำหรับใช้ในงานรับส่งคลื่นความถี่วิทยุ เล่ม 8 ข้อต่อร่วมแกน ขนาดตัวนำรอบนอก 6.5 มิลลิเมตรที่เชื่อมต่อแบบสลักล็อก อิมพีแดนซ์ลักษณะ 50 โอห์ม (แบบ BNC) มาตรฐานเลขที่ มอก.1619-2541

อาศัยอำนาจตามความในมาตรา 15 แห่งพระราชบัญญัติมาตรฐานผลิตภัณฑ์อุตสาหกรรม พ.ศ. 2511 รัฐมนตรีว่าการกระทรวงอุตสาหกรรมออกประกาศยกเลิกประกาศกระทรวงอุตสาหกรรม ฉบับที่ 2526 (พ.ศ.2542) ออกตามความในพระราชบัญญัติมาตรฐานผลิตภัณฑ์อุตสาหกรรม พ.ศ.2511 เรื่อง กำหนดมาตรฐานผลิตภัณฑ์อุตสาหกรรม ข้อต่อสำหรับใช้ในงานรับส่งคลื่นความถี่วิทยุ เล่ม 8 ข้อต่อร่วมแกน ขนาดตัวนำรอบนอก 6.5 มิลลิเมตรที่เชื่อมต่อแบบสลักล็อก อิมพีแดนซ์ลักษณะ 50 โอห์ม (แบบ BNC) ลงวันที่ 26 สิงหาคม พ.ศ.2542 และออกประกาศ กำหนดมาตรฐานผลิตภัณฑ์อุตสาหกรรม ข้อต่อสำหรับใช้ในงานรับส่งคลื่นความถี่วิทยุ เล่ม 8 ข้อต่อร่วมแกน ขนาดตัวนำรอบนอก 6.5 มิลลิเมตรที่เชื่อมต่อแบบสลักล็อก อิมพีแดนซ์ลักษณะ 50 โอห์ม (แบบ BNC) มาตรฐานเลขที่ มอก.1619-2552 ขึ้นใหม่ ดังมีรายละเอียดต่อท้ายประกาศนี้

ทั้งนี้ให้มีผลตั้งแต่วันที่ถัดจากวันที่ประกาศในราชกิจจานุเบกษา เป็นต้นไป

ประกาศ ณ วันที่ 1 กันยายน พ.ศ. 2552

ชาญชัย ชัยรุ่งเรือง

รัฐมนตรีว่าการกระทรวงอุตสาหกรรม

มาตรฐานผลิตภัณฑ์อุตสาหกรรม

ขั้วต่อสำหรับใช้ในงานรับส่งคลื่นความถี่วิทยุ

เล่ม 8 ขั้วต่อร่วมแกนขนาดตัวนำรอบนอก 6.5 มิลลิเมตรที่เชื่อมต่อแบบ สลักล็อกอิมพีแดนซ์ลักษณะ 50โอห์ม (แบบ BNC)

มาตรฐานผลิตภัณฑ์อุตสาหกรรมนี้กำหนดขึ้นโดยรับ IEC 61169-8 (2007) Radio-Frequency Connectors Part 8: Sectional specification-RF coaxial connectors with inner diameter of outer conductor 6,5 mm(0,256in) with bayonet lock-Characteristic impedance 50Ω (type BNC)มาใช้ในระดับเหมือนกันทุกประการ (identical) โดยใช้ IEC ฉบับภาษาอังกฤษเป็นหลัก

มาตรฐานผลิตภัณฑ์อุตสาหกรรมนี้ เป็นข้อกำหนดคุณลักษณะเป็นรายเรื่อง(SS) ที่ให้ข้อมูลและกฎสำหรับการเตรียมข้อกำหนดรายละเอียด (DS) สำหรับขั้วต่อสำหรับใช้ในงานรับส่งคลื่นความถี่วิทยุ ซึ่งใช้กับสายนำสัญญาณชนิด 60096 IEC 50-3 ตาม IEC 60096-2 เหมาะกับการใช้กำลังต่ำ สวมต่อและถอดรวดเร็วด้วยสลักล็อก ซึ่งรู้จักกันในชื่อโดยทั่วไปว่าแบบ BNC

มาตรฐานผลิตภัณฑ์อุตสาหกรรมนี้อธิบายขนาดมิติของผิวสัมผัสสำหรับขั้วต่อ ที่ใช้ในงานทั่วไป, รายละเอียดมิติสำหรับขั้วต่อที่ใช้ในงานทดสอบมาตรฐาน ที่มีข้อมูลการวัด และการทดสอบที่กำหนดโดยมาตรฐาน IEC 61169-1 และยังใช้กับข้อกำหนดรายละเอียด (DS) ทุกประเภทที่เกี่ยวข้องกับขั้วต่อแบบ BNC

ข้อกำหนดนี้ระบุถึงลักษณะสมบัติของสมรรถนะที่แนะนำ ซึ่งถูกพิจารณาเมื่อมีการเขียนข้อกำหนดรายละเอียด(DS) และครอบคลุมถึงตารางทดสอบ และข้อกำหนดสำหรับการตรวจสอบ

รายละเอียดให้เป็นไปตาม IEC 61169-8 (2007)

© IEC 2007

เอกสารนี้เป็นสิทธิ์ของ IEC หากมิได้กำหนดไว้เป็นอย่างอื่นห้ามนำมาตรฐานฉบับนี้หรือ
ส่วนหนึ่งส่วนใดไปทำซ้ำหรือใช้ประโยชน์ในรูปแบบ หรือโดยวิธีใด ๆ ไม่ว่าจะเป็นรูปแบบ
อิเล็กทรอนิกส์หรือทางกล รวมถึงการถ่ายสำเนา ถ่ายไมโครฟิล์ม โดยไม่ได้รับอนุญาตเป็น
ลายลักษณ์อักษรจาก IEC ตามที่อยู่ข้างล่างหรือจากสมาชิก IEC ในประเทศของผู้ร้องขอ

IEC Central office

3, rue de Varembe',

CH-1211 Geneva 20

Switzerland

E-mail : inmail@iec.ch

Web : www.iec.ch

CONTENTS

FOREWORD.....	4
1 Scope	6
2 Normative references	6
3 IEC type designation	6
4 Interface dimensions	7
4.1 Dimensions – General purpose connectors.....	7
5 Mechanical gauges and standard test connectors.....	11
5.1 Mechanical gauges.....	11
5.2 Standard test connectors	14
6 Outline dimensions.....	19
7 Quality assessment procedures	19
7.1 General.....	19
7.2 Ratings and characteristics.....	19
7.3 Test schedule and inspection requirements.....	21
7.4 Procedures.....	23
8 Instructions for preparation of detail specifications	23
8.1 General	23
8.2 Identification of the Detail specification	24
8.3 Identification of the component	24
8.4 Performance.....	24
8.5 Marking, ordering information and related matters	24
8.6 Selection of tests, test conditions and severities.....	24
8.7 Blank detail specification pro-forma for type BNC connector	26
Annex A (normative) Information for interface dimensions of 75 Ω characteristic impedance connector with unspecified reflection factor.....	31
Bibliography	35
Figure 1 – Connector with pin-centre contact (for dimensions, see Table 1)	7
Figure 2 – Details of bayonet lock	8
Figures 3 and 4 – Details of alternative coupling grooves.....	8
Figure 5 – Details of pin-centre contact	8
Figure 6 – Connector with socket-centre contact (for dimensions, see Table 2)	10
Figure 7 – Details of socket-centre contact.....	10
Figure 8 – Gauge for outer contact of pin connector	11
Figure 9 – Gauge pin for socket-centre contact.....	12
Figure 10 – Dimensions of gauge for performance test (see Table 5)	13
Figure 11 – Dimensions of connector (see Table 6)	15
Figure 12 – Dimensions of centre contact (see Table 6).....	15
Figure 13 – Dimensions of connector (see Table 7)	17
Figure 14 – Dimensions of centre contact (see Table 7).....	17
Figure A.1 – Connector with pin centre contact and Figure A.2 – Details of bayonet lock	31

Figure A.3 – Details of alternative coupling grooves.....	31
Figure A.4 – Details of pin centre contact	31
Figure A.5 – Connector with socket centre contact	33
Figure A.6 – Position of coupling studs.....	33
Figure A.7 – Details of socket centre contact.....	33
Table 1 – Dimensions for connector with pin-centre contact.....	9
Table 2 – Dimensions for connector with socket-centre contact.....	11
Table 3 – Dimensions for gauges for outer contact of pin connector.....	12
Table 4 – Dimensions for gauge pin for socket-centre contact.....	12
Table 5 – Dimensions of gauge for performance test	14
Table 6 – Dimensions of centre contact.....	16
Table 7 – Dimensions for standard test connector	18
Table 8 – Preferred climatic categories (see IEC 60068-1):.....	19
Table 9 – Ratings and characteristics	20
Table 10 – Acceptance tests	21
Table 11 – Periodic tests	22
Table A.1 – Dimensions for pin connector	32
Table A.2 – Dimensions for socket connector	34

INTERNATIONAL ELECTROTECHNICAL COMMISSION

RADIO-FREQUENCY CONNECTORS –

Part 8: Sectional specification – RF coaxial connectors with inner diameter of outer conductor 6,5 mm (0,256 in) with bayonet lock – Characteristic impedance 50 Ω (type BNC)

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61169-8 has been prepared by subcommittee 46F: RF and microwave passive components, of IEC technical committee 46: Cables, wires, waveguides, RF connectors, RF and microwave passive components and accessories.

This first edition of IEC 61169-8 cancels and replaces IEC 60169-8 published in 1978 as well as its Amendment 1 (1996) and Amendment 2 (1997). This edition constitutes a technical revision.

This first edition of IEC 61169-8 differs from IEC 60169-8 primarily in that it contains a new Clause 7: Quality assessment procedures and a new Clause 8: Instructions for preparation of detail specifications. Furthermore this IEC 61169-8 refers to IEC 61169-1 whereas IEC 60169-8 referred to IEC 60169-1.

The text of this standard is based on the following documents:

FDIS	Report on voting
46F/57/FDIS	46F/67/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61169 series, published under the general title *Radio frequency connectors*, can be found on the IEC website.

The QC number that appears on the front cover of this publication is the specification number in the IEC Quality Assessment System for Electronic Components (IECQ).

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

RADIO-FREQUENCY CONNECTORS –

Part 8: Sectional specification – RF coaxial connectors with inner diameter of outer conductor 6,5 mm (0,256 in) with bayonet lock – Characteristic impedance 50 Ω (type BNC)

1 Scope

This part of IEC 61169, which is a sectional specification (SS), provides information and rules for the preparation of detail specifications (DS) for RF coaxial connectors which may preferably be used with RF cables 60096 IEC 50-3 of IEC 60096-2. These connector patterns are for low power, quick connect/disconnect applications using a bayonet type coupling mechanism and are commonly known as type "BNC".

It describes the interface dimensions for general purpose connectors, dimensional details for standard test connectors together with gauging information and the mandatory tests selected from IEC 61169-1, applicable to all DS relating to type BNC connectors.

This specification indicates the recommended performance characteristics to be considered when writing a DS and covers test schedules and inspection requirements.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-1:1988, *Environmental testing – Part 1: General and guidance*
Amendment 1 (1992)

IEC 60096-2, *Radio-frequency cables – Part 2: Relevant cable specifications*

IEC 61169-1:1992, *Radio-frequency connectors – Part 1: Generic specification – General requirements and measuring methods*

3 IEC type designation

Connectors of this standard shall be designated by:

- a) the reference to this standard, 61169-8 IEC;
- b) a serial number (see Clause 6);
- c) a letter corresponding to the climatic category (see 7.2).

Example:

61169-8-IEC-1A denotes a free pin connector belonging to climatic category 40/85/21 to be used with an RF coaxial cable 60096 IEC 50-3-1/3/4.

NOTE The type designation used in this standard is provisional. A final type designation is under consideration.

4 Interface dimensions

4.1 Dimensions – General purpose connectors

The original dimensions are in inches.

All undimensioned pictorial configurations are for reference purposes only.

4.1.1 Pin connector

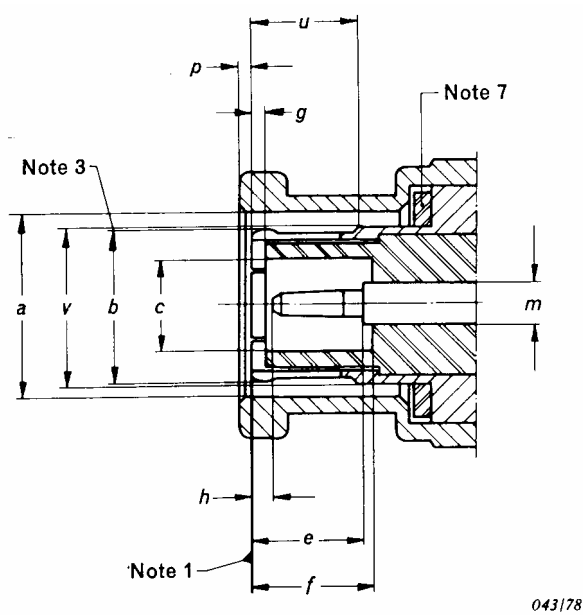


Figure 1 – Connector with pin-centre contact (for dimensions, see Table 1)


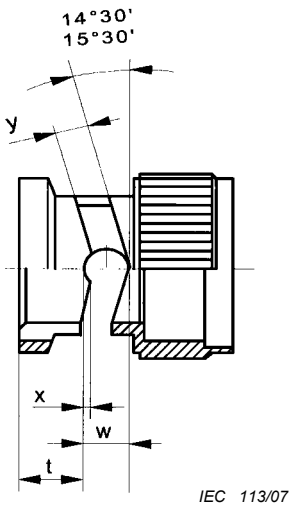


Figure 2 – Details of bayonet lock

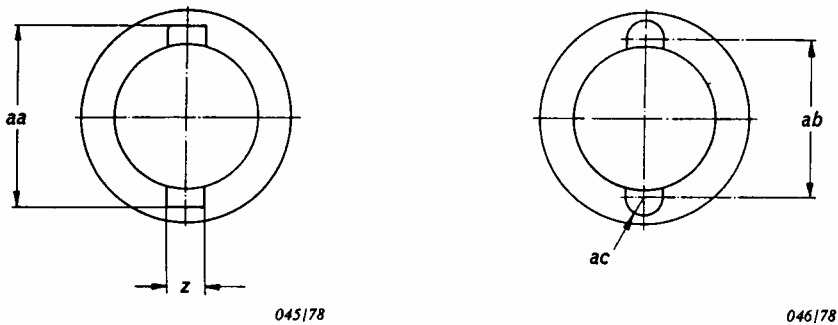

Figures 3 and 4 – Details of alternative coupling grooves

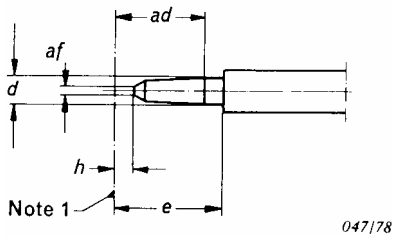


Figure 5 – Details of pin-centre contact

Table 1 – Dimensions for connector with pin-centre contact

Reference	mm		inch		Note
	Min.	Max.	Min.	Max.	
a	9,78	9,91	0,385	0,390	9/diam.
b	–	–	–	–	3/9/diam.
c	4,83	–	0,190	–	9/diam.
d	1,32	1,37	0,052	0,054	9/diam.
e	5,33	–	0,210	–	
f	5,28	–	0,208	–	
g	0,15	–	0,006	–	
h	0,08	1,02	0,003	0,040	
m	2,140 nom.		0,0842 nom.		diam.
p	1,44 nom.		0,057 nom		10
u	5,38	–	0,212	–	
v	–	8,18	–	0,322	9/diam.
z	2,31	2,46	0,091	0,097	6
aa	11,76	–	0,463	–	6
ab	10,14 nom.		0,399 nom.		6
ac	1,14	–	0,045	–	6/rad.
ad	1,96	3,05	0,077	0,120	
af	–	0,64	–	0,025	diam.
t	4,47	4,67	0,180	0,184	
w	3,15	–	0,124	–	
x	0,46	0,56	0,018	0,022	
y	2,31	2,46	0,091	0,097	
NOTE 1 Mechanical and electrical reference plane.					
NOTE 3 Slotted and flared to meet gauge test according to 5.1.1.					
NOTE 6 It is permitted to use either Figure 3 or Figure 4.					
NOTE 7 Sealing gasket to meet required electrical and environmental performance.					
NOTE 9 Diameters shall be gauged to ensure that on mmC each feature is on or can take up a common axis.					
NOTE 10 This dimension shows the position when the bayonet sleeve is locked.					

4.1.2 Socket connector

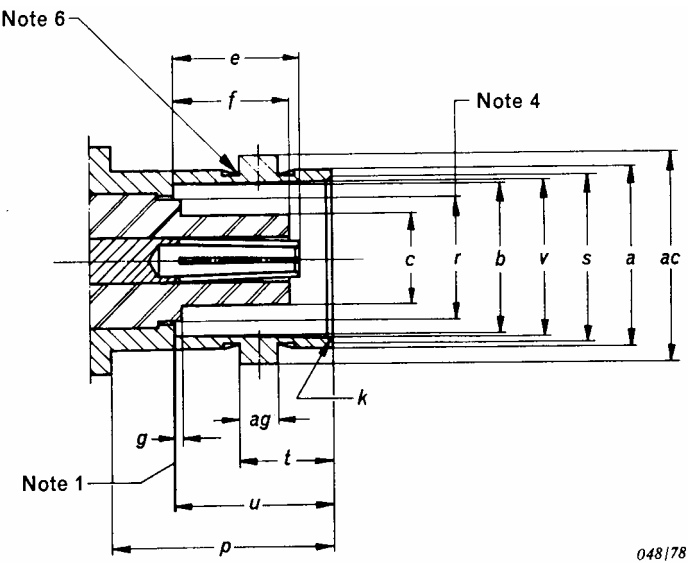


Figure 6 – Connector with socket-centre contact (for dimensions, see Table 2)

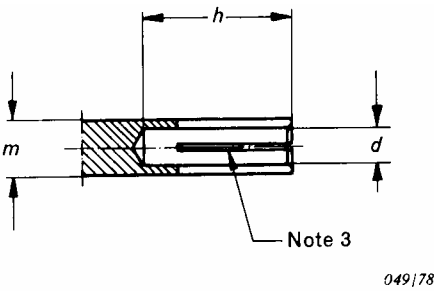


Figure 7 – Details of socket-centre contact

Table 2 – Dimensions for connector with socket-centre contact

Reference	mm		inch		Note
	Min.	Max.	Min.	Max.	
a	9,60	9,70	0,378	0,382	9/diam.
b	8,10	8,15	0,319	0,321	9/diam
c	—	4,72	—	0,186	9/diam.
d	-	-	-	-	3/9/diam.
e	4,55	5,23	0,179	0,206	
f	-	5,28	-	0,208	
g	-	0,15	-	0,006	
h	4,95	-	0,195	—	
k	—	—	—	—	8
m	2,140 nom.		0,0842 nom.		diam.
p	10,52	-	0,414	—	
r	—	6,50	—	0,256	4/diam.
s	8,79	9,04	0,346	0,356	diam.
t	5,18	5,28	0,204	0,208	
u	8,31	8,51	0,327	0,335	
v	8,31	8,46	0,327	0,333	9/diam.
ac	10,97	11,07	0,432	0,436	9
ag	1,91	2,05	0,075	0,081	diam.

NOTE 1 Mechanical and electrical reference plane.
 NOTE 3 Slotted and closed to meet requirements of 5.1.2.
 NOTE 4 Applies only when dielectric extends beyond reference plane.
 NOTE 6 A concave depression between studs is permissible.
 NOTE 8 Chamfer or radius.
 NOTE 9 Diameters shall be gauged to ensure that on mmC each feature is on or can take up a common axis.

5 Mechanical gauges and standard test connectors

5.1 Mechanical gauges

5.1.1 Connectors with pin centre contact

5.1.1.1 Gauge for outer contact of pin connector

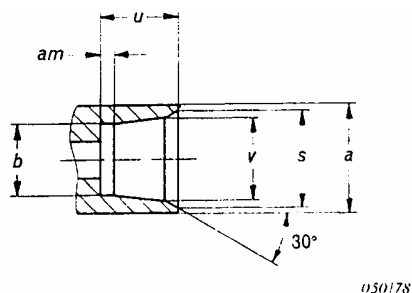


Figure 8 – Gauge for outer contact of pin connector

Table 3 – Dimensions for gauges for outer contact of pin connector

Gauge A (for sizing purposes)					Gauge B (for measurement of gauge retention force for outer conductor) Mass (weight) of gauge: 225 ± 5 g			
Reference	mm		inch		mm		inch	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
$a \phi$	9,63	9,68	0,379	0,381	9,63	9,68	0,379	0,381
$b \phi$	8,08	8,10	0,318	0,319	8,15	8,18	0,321	0,322
u	8,41	8,46	0,331	0,333	8,36	8,41	0,329	0,331
$v \phi$	8,31	8,36	0,327	0,329	8,41	8,46	0,331	0,333
$s \phi$	8,79 nom.		0,346 nom.		8,79 nom.		0,346 nom.	
am	4 nom.		0,157 nom.		4 nom.		0,157 nom.	
Material: steel, polished; surface roughness: Ra = 0,4 μm (16 μin) maximum.								

5.1.1.2 Test sequence

Gauge A shall be placed over the outer electrical contact of the connector once. This is a sizing operation and should be carried out when the insulator is removed from the connector.

After this the gauge B shall be placed over the outer contact in a vertical position. The gauge shall be retained.

This test can also be carried out on connectors when the insulator is not removed.

5.1.2 Connectors with socket-centre contact

5.1.2.1 Gauge pin for socket-centre contact

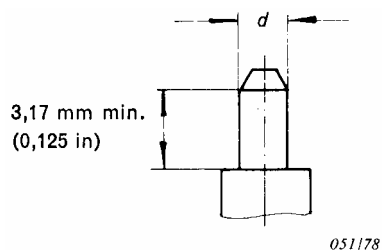


Figure 9 – Gauge pin for socket-centre contact

Table 4 – Dimensions for gauge pin for socket-centre contact

Gauge C (for sizing purposes)					Gauge D (for measurement of gauge retention force for inner conductor) Mass (weight) of gauge: 57 ± 1 g			
Reference	mm		inch		mm		inch	
	min.	max.	min.	max.	min.	max.	min.	max.
$d\phi$	1,372	1,377	0,0540	0,0542	1,308	1,321	0,0515	0,0520
Material: steel, polished; surface roughness: Ra = 0,4 µm (16 µin) max.								

5.1.2.2 Test sequence

A test pin gauge C shall be inserted into the centre contact a minimum distance of 3,17 mm (0,125 in) once. This is a sizing operation and should be carried out when the insulator is removed from the connector.

After this the gauge D shall be inserted in the vertical position. The gauge shall be retained.

This test can also be carried out on connectors when the insulator is not removed.

5.1.3 Gauge for outer contacts, coupling mechanism and mating face dimensions

A steel standard mating part shall be constructed as shown in Figure 10 for the connector and shall have a $0,4 \mu\text{m}$ ($16 \mu\text{in}$) maximum finish. The longitudinal force required to engage or disengage a pin connector shall not exceed 20 N.

The torque required to engage or disengage the bayonet lock of the pin connector shall not exceed 0,25 Nm.

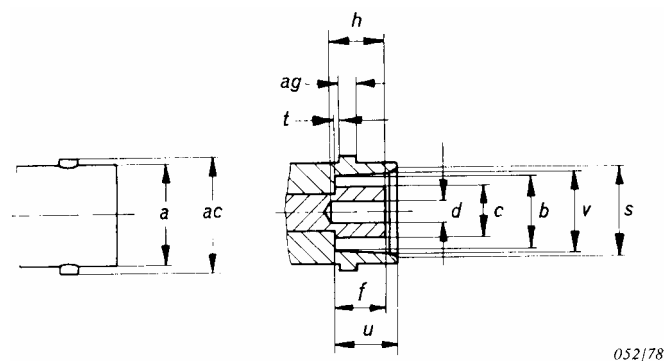


Figure 10 – Dimensions of gauge for performance test (see Table 5)

Table 5 – Dimensions of gauge for performance test

Reference	mm		inch		Note
	Min.	Max.	Min.	Max.	
<i>a</i>	9,627	9,677	0,379	0,381	diam.
<i>b</i>	8,10	8,128	0,319	0,320	diam.
<i>c</i>	4,67	4,72	0,184	0,186	diam.
<i>d</i>	1,42	–	0,056		diam.
<i>f</i>	5,21	5,28	0,205	0,208	
<i>h</i>	4,95	–	0,195	–	
<i>s</i>	8,79	8,865	0,346	0,349	diam.
<i>t</i>	2,870	3,142	0,113	0,124	
<i>u</i>	8,41	8,46	0,331	0,333	
<i>v</i>	8,30	8,382	0,327	0,330	diam.
<i>ac</i>	11,024	11,074	0,434	0,436	diam.
<i>ag</i>	1,98	2,03	0,078	0,080	

5.2 Standard test connectors

Standard test connectors are mainly used as part of the adaptor to the measuring equipment to carry out reflection coefficient measurement according to 9.2.1 of IEC 61169-1.

5.2.1 Standard test connector with pin contact

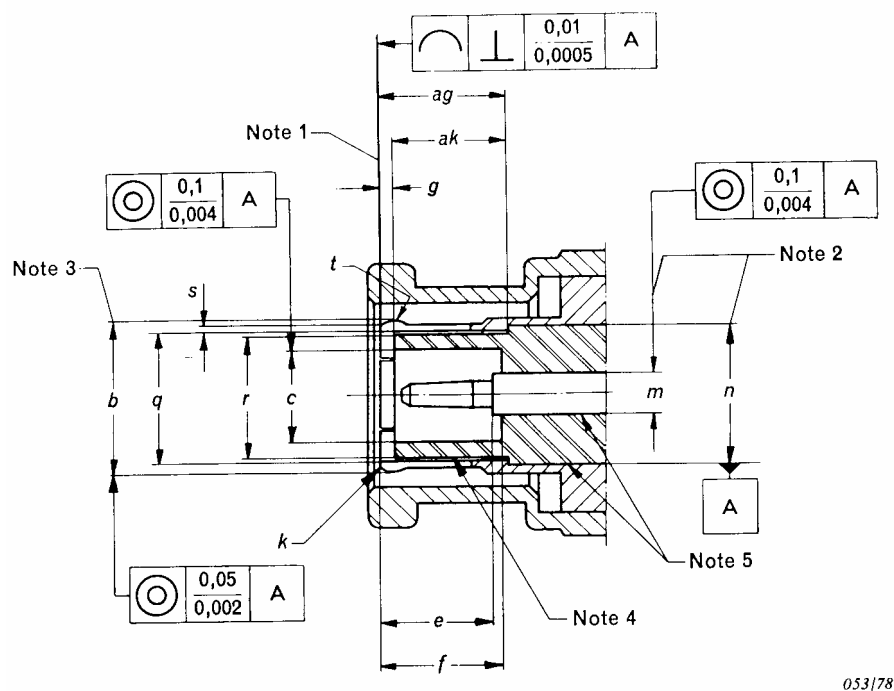


Figure 11 – Dimensions of connector (see Table 6)

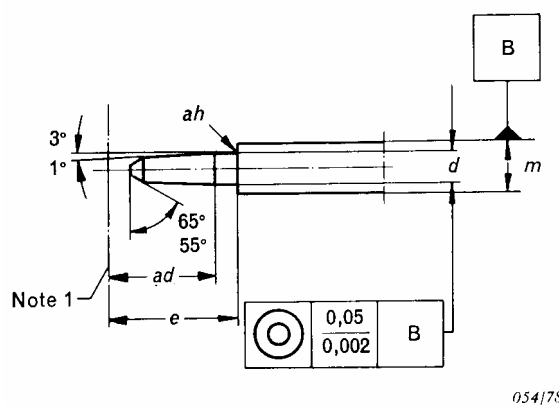


Figure 12 – Dimensions of centre contact (see Table 6)

Table 6 – Dimensions of centre contact

Reference	mm		Inch		Note
	Min.	Max.	Min.	Max.	
<i>b</i>	8,10	8,15	0,319	0,321	3/diam.
<i>c</i>	4,88	4,93	0,192	0,194	diam.
<i>d</i>	1,35	1,37	0,0530	0,0541	diam.
<i>e</i>	5,31	5,38	0,209	0,212	
<i>f</i>	5,38	5,54	0,212	0,218	
<i>g</i>	0,15	0,30	0,006	0,012	
<i>k</i>	0,13	0,20	0,005	0,008	rad.
<i>m</i>	2,13	2,15	0,0837	0,0847	2/diam.
<i>n</i>	6,99	7,01	0,2752	0,2760	2/diam.
<i>q</i>	6,72	6,74	0,2645	0,2655	diam.
<i>r</i>	6,60	6,65	0,260	0,262	diam.
<i>s</i>	0,30	—	0,012	—	plat/flat
<i>t</i>	—	0,89	—	0,035	rad.
<i>ad</i>	3,66	3,98	0,144	0,157	
<i>ag</i>	5,31	5,36	0,209	0,211	
<i>ah</i>	—	0,13	—	0,005	rad.
<i>ak</i>	5,16 nom.		0,203 nom.		

Dimensions of bayonet lock system, see 4.1.1, Figures 2, 3 and 4

NOTE 1 Mechanical and electric reference plane. Right-angled to the axis 0,01 mm (0,0005 in).

NOTE 2 These diameters are for PTFE insulation with dielectric constant 2,02. Characteristic impedance of transmission line determined by diameters “*m*” and “*n*” shall be 50 Ω ± 0,2 Ω.

NOTE 3 Dimensions before slotting:
six slots spaced 60 ± 1° apart,
0,36 mm - 0,41 mm (0,014 in - 0,016 in)wide,
5,84 mm - 6,10 mm (0,230 in - 0,240 in) deep,
After slotting and flaring the ID of the outer contact must be 6,718 mm to 6,744 mm (0,2645 in to 0,2655 in) when the OD of the outer contact is inserted into a ring gauge with an ID of 8,125 mm to 8,131 mm (0,3199 in to 0,3201 in).

NOTE 4 If concentric, radial air gap 0,05 mm (0,002 in) nom. When contact is inserted into a ring gauge with an ID of 8,125 mm to 8,131 mm (0,3199 in to 0,3201 in).

NOTE 5 Zero air gap.

5.2.2 Standard test connector with socket contact

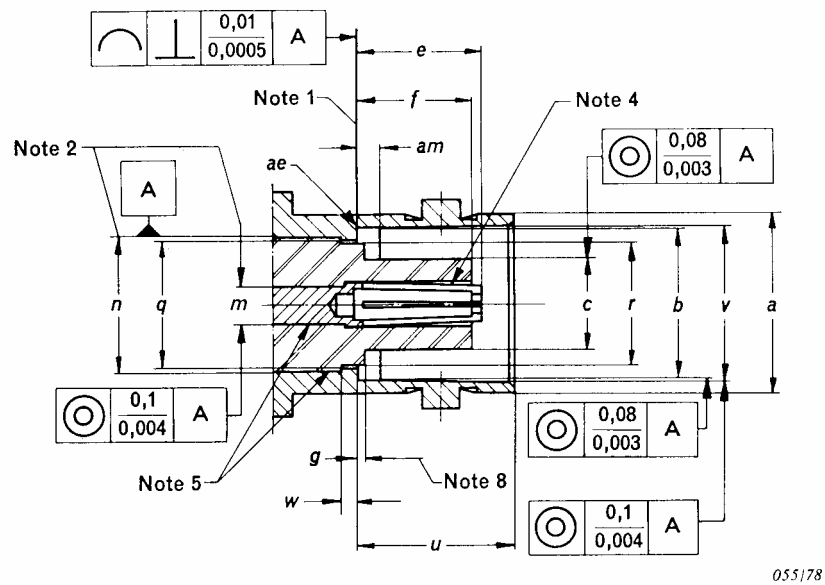


Figure 13 – Dimensions of connector (see Table 7)

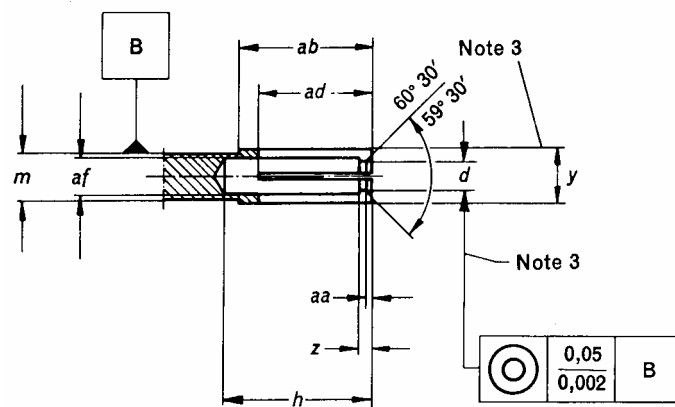


Figure 14 – Dimensions of centre contact (see Table 7)

Table 7 – Dimensions for standard test connector

Reference	mm		inch		Note
	Min.	Max.	Min.	Max.	
<i>a</i>	9,60	9,68	0,378	0,381	diam.
<i>b</i>	8,10	8,15	0,319	0,321	diam.
<i>c</i>	4,67	4,72	0,184	0,186	diam.
<i>d</i>	1,356	1,361	0,0534	0,0536	3/diam.
<i>e</i>	5,21	5,28	0,205	0,208	
<i>f</i>	5,08	5,23	0,200	0,206	
<i>g</i>	0,0	0,15	0,00	0,006	8
<i>h</i>	5,21	–	0,205	–	
<i>m</i>	2,13	2,15	0,0837	0,0847	2/diam.
<i>n</i>	6,99	7,01	0,2752	0,2760	2/diam.
<i>q</i>	6,71	6,76	0,264	0,266	diam.
<i>r</i>	6,58	6,68	0,259	0,263	diam.
<i>u</i>	8,36	8,46	0,329	0,333	
<i>v</i>	8,31	8,46	0,327	0,333	diam.
<i>w</i>	0,79	0,84	0,031	0,033	
<i>y</i>	2,16	2,18	0,0852	0,0859	3/diam.
<i>z</i>	0,38	0,89	0,015	0,035	
<i>aa</i>	0,05	0,2	0,002	0,008	
<i>ab</i>	6,05	6,10	0,238	0,240	
<i>ad</i>	4,62	4,88	0,182	0,192	
<i>ae</i>	–	0,1	–	0,004	rad.
<i>af</i>	1,52	1,63	0,060	0,064	diam.
<i>am</i>	0,51	1,02	0,020	0,040	
For dimensions not given in this table, see 4.1.2					
NOTE 1 Mechanical and electric reference plane.					
NOTE 2 These diameters are for PTFE insulation with dielectric constant 2,02. Characteristic impedance of transmission line determined by diameters “ <i>m</i> ” and “ <i>n</i> ” shall be $50 \Omega \pm 0,2 \Omega$.					
NOTE 3 Four slots 0,18 mm - 0,23 mm (0,007in - 0,009 in) wide; between 90° 30' and 80° 30' apart; diameter “ <i>y</i> ” with 1,356 mm (0,0534 in) min.; 1,361 mm (0,0536 in) max.; pin gauge inserted after slotting and closing.					
NOTE 4 If concentric 0,02 mm (0,0008 in) radial air gap when mated with 1,359 mm (0,0535 in) diameter pin.					
NOTE 5 Zero air gap.					
NOTE 8 Insulator shall be flush or protruding.					

6 Outline dimensions

Under consideration.

7 Quality assessment procedures

7.1 General

The following subclauses provide recommended ratings, performance and test conditions to be considered when writing a detail specification (DS). They also provide an appropriate schedule of tests with minimum levels of conformance inspection.

7.2 Ratings and characteristics

This standard specified pin and socket connectors with bayonet lock with a nominal inner diameter of the outer conductor of 6,5 mm (0,256 in). Cable mounting connectors will function within specification requirements with 3 mm cables up to a frequency of at least 3 GHz, and may be used at higher frequencies if a reflection coefficient greater than 0,1 can be tolerated for straight connectors and 0,13 for right angle styles.

The connectors have a maximum working voltage of 500 V at sea level (125 V at 44 mbar/ 20 000 m altitude). Connection to the cable may be made either by crimping or soldering, depending upon design.

NOTE 1 Patterns for crimping are under consideration. Certain connectors have both barrier and panel seals.

NOTE 2 All voltages specified in this standard are r.m.s. values of a.c. voltages. All test voltages are a.c. voltages of 50 Hz to 60 Hz.

NOTE 3 For details of symbols, abbreviations and procedures, see 7.3.2.

Table 8 – Preferred climatic categories (see IEC 60068-1)

Category	Designation letter*	Temperature range	Damp heat, steady state
40/85/21	A	–40 °C to +85 °C	21 days
40/155/21	B	–40 °C to +155 °C	21 days
55/155/56	C	–55 °C to +155 °C	56 days
* To be included in the IEC type designation (see Clause 3).			

Table 9 – Ratings and characteristics

Ratings and characteristics	IEC 61169-1 subclause	Value	Remarks including any deviations from standard test methods
<i>Electrical</i>			
Nominal impedance		50 Ω	
Frequency range		Up to 4 GHz	
– Grade 2 connectors			
Reflection factor	9.2.1		
– straight styles ^a		$\leq 0,13$	
– right angle styles		$\leq 0,15$	
– component mounting styles		As specified in the DS	
– solder bucket and PCB mounting styles		As specified in the DS	
Centre contact resistance	9.2.3		
– initial		$\leq 1,5 \text{ m}\Omega$	
– after conditioning		$\leq 2,5 \text{ m}\Omega$	
Outer conductor continuity ^a	9.2.3		
– initial		$\leq 1 \text{ m}\Omega$	
– after conditioning		$\leq 2 \text{ m}\Omega$	
Insulation resistance ^a	9.2.5		
– initial		$\geq 5 \text{ G}\Omega$	
– after conditioning		$\geq 200 \text{ M}\Omega$	
Proof voltage at sea level ^{b c}	9.2.6		
– cables 60096 IEC 50-4		1500 V	
– cables 60096 IEC 50-3		1000 V	
– cables 60096 IEC 50-2		750 V	
Proof voltage at 4,4 kPa ^{b c}	9.2.6		4,4 kPa approximately equivalent to 20 km
– cables 60096 IEC 50-4		180 V	
– cables 60096 IEC 50-3		180 V	
– cables 60096 IEC 50-2		150 V	
Screening effectiveness (straight cabled connectors only)	9.2.8	55 dB to 3 GHz	$Z_1 \leq 178 \text{ m}\Omega$
Discharge test (Corona)	9.2.9		
– at sea level		$\geq 500 \text{ V}$	Extinction voltage
– (cable 60096 IEC 50-3)			
<i>Mechanical</i>			
Centre contact captivation	9.3.5		
– axial force		15 N	
– torque		na	
Engagement and separation force and torque, bayonet coupling	9.3.6		
– axial force		$\leq 20 \text{ N}$	
– torque		0 to 0,25 Nm.	
Gauge retention force (resilient contacts)	9.3.4		
– centre		0,57 N	
– outer		2,25 N	
Mechanical tests on cable fixing cable pulling, force minimum	9.3.7		
– cables 60096 IEC 50-4		300 N	
– cables 60096 IEC 50-3		180 N	
– cables 60096 IEC 50-2		100 N	
Cable torsion	9.3.10		
– cables 60096 IEC 50-4		0,40 Nm	
– cables 60096 IEC 50-3		0,30 Nm	
– cables 60096 IEC 50-2		0,15 Nm	
Tensile strength of coupling mechanism	9.3.11	445 N	
Bending moment (and sharing force)	9.3.12	1 Nm	Relative to reference plane

Ratings and characteristics	IEC 61169-1 subclause	Value	Remarks including any deviations from standard test methods
Vibration	9.3.3	100 m/s ² 10 Hz – 2 000 Hz	10 g _n acceleration
Bump	9.3.13	–	
Shock	9.3.14	500 m/s ² ½ sin 6 ms	50 g _n acceleration
<i>Environmental</i>			
Climatic category ^d		40/155/21	
Sealing – non-hermetic	9.4.5.1	1 cm ³ /h max. 100 kPa – 110 kPa differential	
Sealing – hermetic	9.4.5.2	1 Pa cm ³ /s (10 ⁻⁵ bar cm ³ /s) 100 kPa – 110 kPa differential	
Salt mist	9.4.6	Duration of spraying: 48 h	
<i>Endurance</i>			
Mechanical	9.5	500 operations	
High temperature ^d	9.6	1 000 h at 155 °C	

^a These values apply to basic connectors. They depend on the cable used. Relevant values are given in the DS.

^b Voltage values are r.m.s. values at 50-60 Hz, unless otherwise specified.

^c Cables used with these connectors may have values of lower performance than those given in this table.

^d For certain connectors the upper temperature limit is restricted by the cable characteristics. Reference should be made to the relevant cable specification.

7.3 Test schedule and inspection requirements

7.3.1 Acceptance tests

Table 10 – Acceptance tests

	Test method IEC 61169-1 subclause	Assessment level M (higher)				Assessment level H (lower)			
		Test Required	IL	AQL %	Period	Test Required	IL	AQL %	Period
<i>Group A1</i>									
Visual examination	9.1.2	a	II	1,0		a	S3	1,5	
<i>Group B1</i>									
Outline dimensions	9.1.3.1	a	S4	0,4		a	S3	4,0	
Mechanical compatibility	9.1.3.3	a	II	1,0		a	S3	1,5	
Engagement and separation	9.3.6	a	S4	0,40	Lot	a	S3	1,5	Lot
Gauge retention (resilient contact)	9.3.4	ia	II	1,0		ia	S3	1,5	
Sealing, non-hermetic	9.4.5.1	ia	II	0,65	by	ia	S3	1,0	by
Sealing, hermetic	9.4.5.2	ia	II	0,015		ia	S3	0,025	
Voltage proof	9.2.6	a	S4	0,40	lot	a	II	4,0	lot
Solderability piece parts	9.3.2.1.1	ia	S4	0,40		ia	S3	4,0	
Insulation resistance	9.2.5	a	S4	0,40		a	S3	4,0	

7.3.2 Periodic tests

There are no group C tests for levels H and M.

NOTE For details of symbols, abbreviations and procedures, see Table 11.

Table 11 – Periodic tests

	Test method IEC 61169-1 subclause	Assessment level M (higher)				Assessment level H (lower)			
		Test required	Number of specimens	Permitted failures per group#	Period	Test required	Number of specimens	Permitted failures per group#	Period
<i>Group D1 (d)</i>			6	1	3 years		3	1	3 years
Solderability connector assemblies	9.3.2.1.1	ia				ia			
Resistance to soldering heat	9.3.2.1.2	ia				ia			
Mechanical tests on cable fixing									
– cable rotation (nutation)	9.3.7.2	ia				ia			
– cable pulling	9.3.8	ia				ia			
– cable bending	9.3.9	ia				ia			
– cable torsion	9.3.10	ia				ia			
<i>Group D2 (d)</i>			6	1	3 years		3	1	3 years
Contact resistance, outer conductor and screen continuity centre conductor continuity	9.2.3	a				a			
Vibration	9.3.3	a							
Damp heat, steady state	9.4.3	a				a			
<i>Group D3 (d)</i>			1*	1	3 years		1*	1	3 years
Dimensions piece-parts and materials	9.1.3.2	a				a			
<i>Group D4 (d)</i>			6	1	3 years		3	1	3 years
Mechanical endurance	9.5	a				a			
High temperature endurance	9.6	a				a			
Sulphur dioxide	9.4.8	na				na			
<i>Group D5 (d)</i>			6	1	3 years		3	1	3 years
Reflection factor	9.2.1	a				a			
Screening effectiveness	9.2.8	a				a			
Water immersion	9.2.7	ia				ia			

	Test method IEC 61169-1 subclause	Assessment level M (higher)				Assessment level H (lower)			
		Test required	Number of specimens	Permitted failures per group#	Period	Test required	Number of specimens	Permitted failures per group#	Period
<i>Group D6 (d)</i>			6	1	3 years		3	1	3 years
Contact captivation	9.3.5	a				a			
Rapid change of temperature	9.4.4	na				na			
Climatic sequence	9.4.2	a				a			
<i>Group D7 (d)</i>			1§		3 years		1§		3 years
Resistance to solvents and contaminating fluids	9.7	ia				ia			

Details of symbols, abbreviations and procedures:

a = suggested as applicable

ia = test suggested (if technically applicable)

na = not applicable

IL = Inspection Level

AQL = Acceptable Quality Level

* = one set of piece-parts each style and variant, unless using common piece parts

= for Qualification Approval (QA) a total of two failures only permitted for level H and 1 failure only for level M from groups D1 to D7

§ = Group D7 – number of pairs for each solvent

(d) = destructive tests – specimens shall not be returned to stock

7.4 Procedures

7.4.1 Quality conformance inspection

This shall consist of test groups A1 and B1 on a lot-by-lot basis.

7.4.2 Qualification approval and its maintenance

This shall consist of three consecutive lots passing test groups A1 and B1 followed by selection of specimens from the lots as appropriate. These specimens shall successfully pass the specified periodic D tests.

8 Instructions for preparation of detail specifications

8.1 General

Detail specifications (DS) writers shall use the appropriate BDS pro-forma. The following pages comprise the pro-forma BDS dedicated for use with type BNC connectors. As such, it will already have entered on it information relating to

- the basic specification number applicable to all the detail specifications covering connector styles of the type covered by the sectional specification;
- the connector series designation.

The specification writer should enter the details relating to the connector style/variant(s) to be covered as indicated. The numbers in brackets on the BDS pro-forma correspond to the following indications which shall be given.

8.2 Identification of the Detail specification

- (1) The name of the National Standards Organization (NSO) under whose authority the DS is published and, if applicable, the organization from whom the DS is available.
- (2) The relevant mark of conformity and the number allotted to the DS by the relevant national or international organization authorizing the DS
- (3) The number and issue number of the IEC/IECQ generic or sectional specification as relevant; also national reference if different.
- (4) If different from the IEC/IECQ number, any national number of the DS, date of issue and any further information required by the national system, together with any amendment numbers.

8.3 Identification of the component

- (5) Enter the following details:

Style: The style designation of the connector including type of fixing and sealing, if applicable.

Attachment: By deletion of the inapplicable options of cable/wire: given for centre and outer conductors.

Special features and markings: As applicable.

- (6) Enter details of assessment level and the climatic category.
- (7) A reproduction of the outline drawing and details of the panel piercing, if applicable. It shall provide the maximum envelope dimensions, also the position of the reference plane and, in the case of a fixed connector, the position of the mounting plane(s) relative to the front face of the connector.
Any maximum panel thickness limitations for fixed connectors shall be stated.
- (8) Particulars of all variants covered by the DS. As appropriate, the information shall include:
 - cable types (or sizes) applicable to each variant;
 - alternative plated or protective finishes;
 - details of alternative mounting flanges having either tapped or plain mounting holes;
 - details of alternative solder spills or solder buckets including, when applicable, those for use with Microwave Integrated Circuit (MIC) components.

8.4 Performance

- (9) Performance data listing the most important characteristics of the connector taking into account the recommended values of 7.2 in this specification. Deviations from the minimum requirements shall be clearly indicated. Non-applicable parameters shall be marked 'na'.

8.5 Marking, ordering information and related matters

- (10) Insert marking and ordering information as appropriate, together with details of related documents and any invoked structural similarity.

8.6 Selection of tests, test conditions and severities

- (11) 'na' shall be used to indicate non-applicable tests. All tests marked 'a' by the detail specification writer shall be mandatory.

When using the normal procedure with a dedicated BDS, the letter 'a' – for applicable – shall be entered in the 'Test required' column against each of the tests indicated as being mandatory in the test schedule as in 7.3 of this specification. Any additional tests required at the discretion of the specification writer shall also be indicated by an 'a'.

The specification writer shall also indicate, when necessary, details of deviations from the standard test methods and test conditions, including any relevant deviations given in the test schedule of the sectional specification.

The qualification approval and conformance inspection shall be such that the National Supervising Inspectorate (NSI) shall be satisfied that they are appropriate and in line with those for other connectors within the system providing a reasonably comparable service.

8.7 Blank detail specification pro-forma for type BNC connector

The following pages contain the complete BDS pro-forma.

(1)		Page 1 of			
ELECTRONIC COMPONENT OF ASSESSED QUALITY IN ACCORDANCE WITH GENERIC SPECIFICATION QC 220000 SECTIONAL SPECIFICATION QC 222400 NATIONAL REFERENCE		(4) ISSUE			
(5) Detail specification for Radio frequency coaxial connector of assessed quality				type BNC	
Style:.....		Special features and markings			
Method of cable/wire+ attachment		centre conductor – solder/crimp+ outer conductor – solder/clamp/crimp + + delete as appropriate			
(6) Assessment level.....	Characteristic impedance ... Ω		Climatic category....../.../...		
(7) Outline and maximum dimensions			Panel piercing and mounting details		
(8) Variants					
Variant No.	Description of variant	60096 IEC			
01.....					
.....					
.....					
.....					
.....					
.....					
.....					
.....					
Information about manufacturers who have components qualified to this detail specification is available in the current QC 001005 Qualified Product List.					

(9) Performance (including limiting conditions of use)

Ratings and characteristics		IEC 61169-1 (QC 220000) subclause	Value	Remarks including any deviations from standard test methods
<i>Electrical</i>				
Nominal impedance			Ω	
Frequency range			GHz	Measurement frequency range
Reflection factor	Variant No. Designation 01.....	9.2.1		
Centre contact resistance		9.2.3	≤mΩ ≤mΩ	Initial After conditioning
Centre conductor continuity	01.....	9.2.3	mΩmΩmΩmΩ	Resistance change due to conditioning
Outer contact continuity		9.2.3	≤mΩ ≤mΩ	Initial After conditioning
Insulation resistance		9.2.5	≥GΩ ≥GΩ	Initial After conditioning
+ Proof voltage at sea level	01.....	9.2.6	kVkVkVkV	86 kPa - 106 kPa
+ Proof voltage at 4,4 kPa	01.....	9.2.6	VVVV	kPa (if not 4,4 kPa)
Screening effectiveness	01.....	9.2.8	dB at....GHz	$Z_l \leq \dots \text{m}\Omega$
Discharge test (corona) at sea level	01.....	9.2.9	≥ V ≥ V ≥ V ≥ V	Extinction voltage
ADDITIONAL ELECTRICAL CHARACTERISTICS				
+ Voltage values are r.m.s. values at 50 Hz - 60 Hz, unless otherwise specified.				

Ratings and characteristics		IEC 61169-1 (QC 220000) subclause	Value	Remarks including any deviations from standard test methods
<i>Mechanical</i>				
Soldering - bit size		9.3.2.1.1		
Gauge retention resilient contacts		9.3.4.3	N	
- inner contact			N	
- outer contact				
Centre contact captivation		9.3.5	N	
- axial force			mm	
- permitted displacement each direction			Nm	
- torque				
Engagement and separation		9.3.6		
- axial force				
Strength of coupling mechanism		9.3.11	N	
Effectiveness of cable fixing against				
- cable rotation	01.....	9.3.7	Rotations	
				
				
				
- cable pulling	01.....	9.3.8	N	
				
				
				
- cable bending	01.....	9.3.9	Cycles	Length of cable mass
				
				
				
- cable torsion	01.....	9.3.10	Nm	
				
				
				
Bending moment		9.3.12	Nm	Relative to reference plane
Bumps total		9.3.13	m/s ²to..... Hz	(.....g _n acceleration)
Vibration		9.3.3	m/s ²to..... Hz	(.....g _n acceleration)
Shock		9.3.14	m/s ²Shapems	(.....g _n acceleration)
ADDITIONAL MECHANICAL CHARACTERISTICS				

Ratings and characteristics	IEC 61169-1 (QC 220000) Subclause	Value	Remarks including any deviations from standard test methods
<i>Environmental</i> Climatic category Sealing non-hermetically sealed connectors Sealing hermetically sealed connectors Water immersion Salt mist ADDITIONAL ENVIRONMENTAL CHARACTERISTICS	9.4.5.1 9.4.5.2 9.2.7 9.4.6	/...../.....cm ³ /h 10 ⁻⁵ bar/cm ³ /h h	100 kPa to 110 kPa pressure differential 100 kPa to 110 kPa pressure differential Duration of spraying
<i>ENDURANCE</i> Mechanical High temperature ADDITIONAL ENDURANCE CHARACTERISTICS	9.5 9.6	operationsh at.....°C	
<i>CHEMICAL CONTAMINATION</i> Resistance to solvents and contaminating fluids to be used. Applicable fluids. Sulphur dioxide	9.7 9.4.8	 days	

10) Supplementary information

- Marking of the component: in accordance with 11.1 of IEC 61169-1 (QC 220000) in the following order of preference:
 - 1) Manufacturer code:
 - 2) Manufacturing date code: year/week
 - 3) Component identification: Variant No. / Identification
Designation
.....
.....
.....
.....
.....
.....
.....
- Marking and contents of package: in accordance with 11.2 of IEC 61169-1
 - 1) Information prescribed in 11.1 of IEC 61169-1 detailed above
 - 2) Nominal characteristic impedance Ω
 - 3) Assessment level code letter
 - 4) Any additional marking required
- Ordering information
 - 1) Number of the detail specification IECQC 222XXX...../Variant code
 - 2) Assessment level code letter
 - 3) Body finish (if more than one listed)
 - 4) Any additional information or special requirements
- Related documents (if not included in IEC 61169-1 or sectional specification):
.....
.....
- Structural similarity in accordance with 10.2.2 of IEC 61169-1
NOTE Relevant information on a basic style should be entered as variant 01.

Annex A (normative)

Information for interface dimensions of 75 Ω characteristic impedance connector with unspecified reflection factor

A.1 Dimensions – General purpose connectors

The following interface dimensions for 75 Ω BNC connectors ensure that these connectors will mate with the 50 Ω BNC connectors described in the standard in a non-destructive manner. Inch dimensions are original dimensions.

A.2 Pin connector (for dimensions see Table A.1)

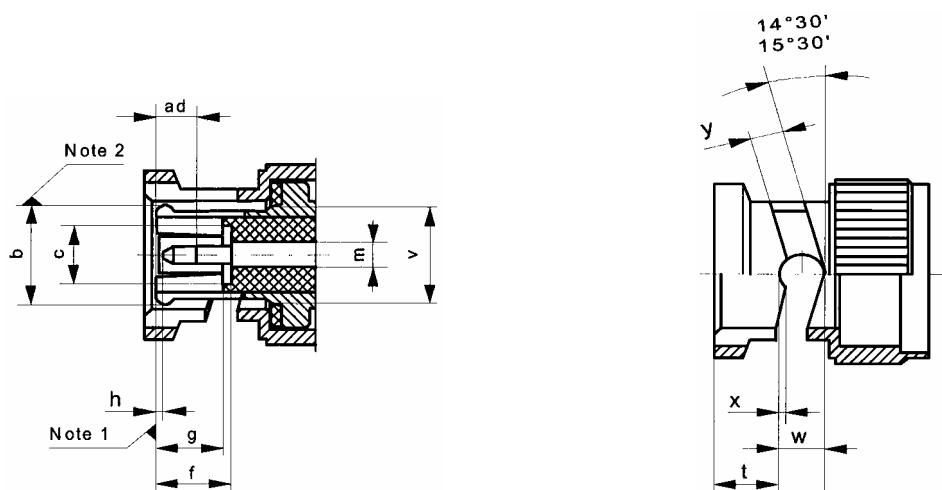


Figure A.1 – Connector with pin centre contact Figure A.2 – Details of bayonet lock

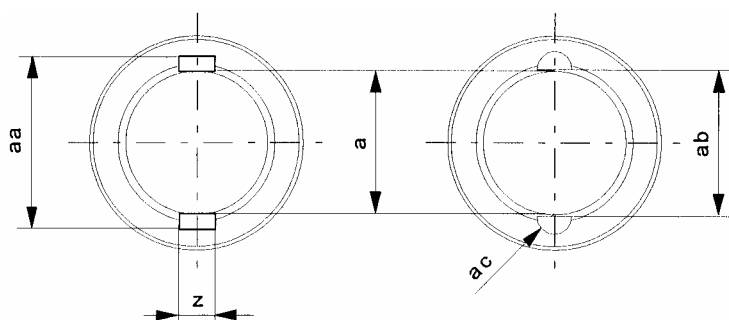


Figure A.3a

Figure A.3b

Figure A.3 – Details of alternative coupling grooves




Figure A.4 – Details of pin
centre contact

Table A.1 – Dimensions for pin connector

Ref.	Mm		in		Notes
	Min.	Max.	Min.	Max.	
a	9,78	9,91	0,385	0,390	6/diam
b	–	–	–	–	2/6diam.
c	4,83	–	0,190	–	3/6/diam
d	1,32	1,37	0,052	0,054	3/diam.
e	5,33	–	0,210	–	
f	5,28	5,79	0,208	0,228	4
g	4,30	5,30	0,169	0,209	3
h	0,08	1,02	0,003	0,040	
m	2,06	2,21	0,081	0,087	diam
t	4,47	4,67	0,180	0,184	
v	–	8,18	–	0,322	6/diam
w	3,15	–	0,124	–	
x	0,46	0,56	0,018	0,022	
y	2,31	2,46	0,091	0,097	
z	2,31	2,46	0,091	0,097	5
aa	11,76	12,01	0,463	0,473	5
ab	10,01	10,16	0,394	0,400	5
ac	1,14	1,24	0,045	0,049	5/rad
ad	–	3,86	–	0,152	
af	–	0,64	–	0,025	diam.
NOTE 1 Mechanical and electrical reference plane. NOTE 2 Slotted and flared to meet electrical and mechanical requirements. NOTE 3 Reference c and reference g are applicable only when the dielectric support is counterbored. NOTE 4 Reference f also specifies the end of the dielectric support that is not counterbored. NOTE 5 It is permitted to use either Figure A.3a or Figure A.3b. NOTE 6 Diameters on mmC shall be on or be capable of taking a common axis.					

A.3 Socket connector (for dimensions see Table A.2)

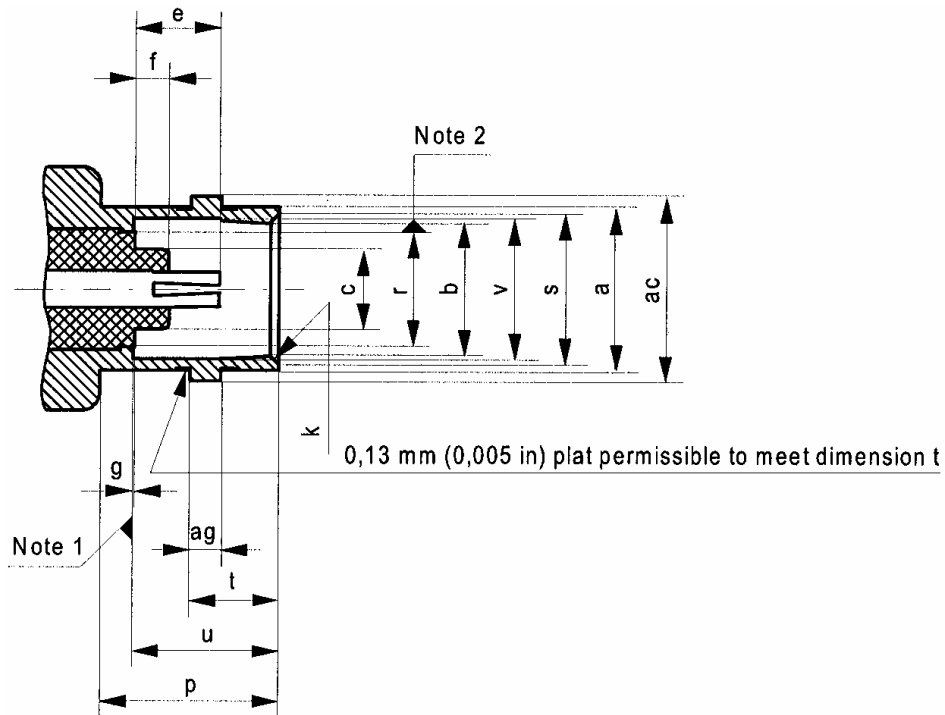


Figure A.5 – Connector with socket centre contact




Figure A.6 – Position of coupling studs

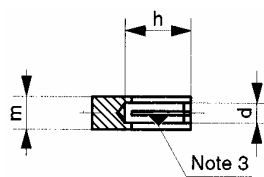


Figure A.7 – Details of socket centre contact

Table A.2 – Dimensions for socket connector

Ref.	Mm		in		Notes
	Min.	Max.	Min.	Max.	
a	9,60	9,70	0,378	0,382	5/diam
b	8,10	8,15	0,319	0,321	5/diam
c	–	4,72	–	0,186	5/diam
d	–	–	–	–	3/5/diam
e	4,72	5,23	0,186	0,206	
f	–	2,31	–	0,091	
g	–	0,15	–	0,006	8
h	4,95	–	0,195	–	
k	–	–	–	–	4
m	1,88	2,29	0,074	0,090	diam
p	10,52	–	0,414	–	
r	–	6,50	–	0,256	2/diam
s	8,79	9,04	0,346	0,356	diam
t	5,18	5,28	0,204	0,208	
u	8,31	8,51	0,327	0,335	
v	8,31	8,46	0,327	0,333	5/diam
ac	10,97	11,07	0,432	0,436	5
ag	1,91	2,06	0,075	0,081	diam
NOTE 1 Mechanical and electrical reference plane.					
NOTE 2 Applies only when dielectric extends beyond reference plane.					
NOTE 3 Slotted and closed to meet electrical and mechanical requirements.					
NOTE 4 Chamfer or radius.					
NOTE 5 Diameters on mmC shall be on or capable of taking up common axis.					

Bibliography

IEC 60068-2-1:1990, *Environmental testing – Part 2: Test – Tests A: Cold*

IEC 60068-2-2:1974, *Basic environmental testing procedures – Part 2: Tests – Test B: Dry heat*

IEC 60068-2-11:1981, *Basic environmental testing procedures – Part 2: Tests – Test Ka: Salt mist*

IEC 60068-2-13:1983, *Basic environmental testing procedures – Part 2: Tests – Test M: Low air pressure*

IEC 60068-2-14:1984, *Basic environmental testing procedures – Part 2: Tests – Test N: Change of temperature*
Amendment 1 (1986)

IEC 60068-2-20:1979, *Basic environmental testing procedures – Part 2: Test – Test T: Soldering*

IEC 60068-2-30:2005, *Environmental testing – Part 2-30: Tests. Test Db: Damp heat, cyclic (12 h + 12 h cycle)*

IEC 60068-2-78:2001, *Environmental testing – Part 2-78: Tests - Test Cab: Damp heat, steady state*
